


# ASCO 920 REMOTE CONTROLLED SWITCH

## DIMENSIONAL DATA


### ASCO 920 WITH SUB PANEL

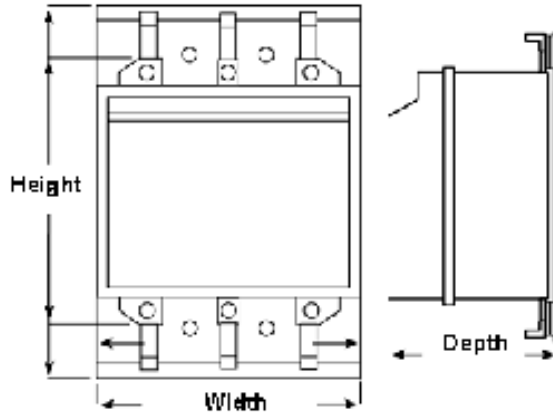

Switch Ratings amps	Open			Approx. Shipping Wt. lbs (kg)	With NEMA Type 1 Enclosure(1)			Approx. Shipping Wt. lbs. (kg)
	Dimensions inches (mm)				Dimensions			
	Width	Height	Depth		Width	Height	Depth	
30-100	7 15/16 (201)	11 1/2 (298)	3 7/8 (98)	8 (3.6)	13 (330)	18 1/4 (464)	4 1/2 (114)	23 (10.4)
150-225	7 15/16 (201)	14 1/2 (368)	3 15/16 (100)	11 (5.0)	13 (330)	24 (610)	4 1/2 (114)	31 (14.0)

1. Enclosure gutter spaces are based on nonlooping of cables within the enclosure. Where cables must be looped within the enclosure. Oversize cabinets are available at extra cost. Contact ASCO for complete information.

### ASCO 920 SWITCH UNIT ONLY

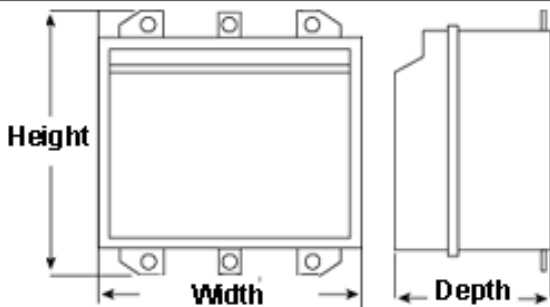

Switch Ratings amps	Dimensions inches (mm)			Approx. Shipping Wt. lbs (kg)
	Width	Height	Depth	
30-100	7 15/16 (201)	8 5/16 (211)	3 1/2 (89)	6 (2.7)
150-225	7 15/16 (201)	9 1/2 (241)	3 1/2 (89)	7 (3.2)

1. Suitable insulation must be behind switch unit.  
2. Suitable for bus bar mounting. Lugs not supplied.